

FIRE ALARM CALL POINT (D-108)



Model D-108

DESCRIPTION

DEMCO Manual Call Point **D-108** is suitable for open or close circuit system and is professionally designed for use in fire detection systems with central control equipment. Alternative terminals are provided for open or close circuits. When wired for open circuit operation, the circuit closes instantly when the glass is smashed. Openings are provided for 3/4" Ø conduit entries from top, bottom and the back. The casings are

moulded from specially selected engineering plastic, which comes in 5 different colours, with high impact strength, high resistance to heat. All metal parts are made of brass and phosphor bronze to ensure life long resistance against corrosion. A high reliability micro switch is also included. **D-108** is designed to meet the requirements of BS5839 Part 2, EN54 Part 2 and approved by Australian Standard AS1603 Part 5.

DEMCO ADVANTAGES

- Double terminal wire connectors for independent input and output connections which facilitate installations when used in looping.
- Provision of thread protection plugs which protect the thread of the brass inserts on the base box when conceal fixing is necessary.
- Incorporation of the instant test operation which is activated by a special key provided.

SPECIFICATION

Size (H x W x D)	88 X 88 X 55 mm
Current Ratings	12/24V DC 10A 48V DC 3A 250V AC 10A
Net/Gross Weight	160/184g
Connections	TERMINAL- MAX 2.5mm ² CABLE

Australian Standard Certificate no. 345

Specifications are subject to change.

OPTIONAL FEATURES

- Polycarbonate transparent protection cover.
- Super-bright LED.
- Monitoring resistor.
- Blocking diode.
- Switch Choices - Two Single Pole Double Throw (SPDT) micro switch. Six terminal provided.




RANGE OF CASING COLOURS
White, Yellow, Green, Red, Blue



DEMCO
INDUSTRIES SDN BHD
www.demcoalarm.com

Lot 3928, Jalan Keretapi Lama
Off Jalan Kapar 5 1/2 Miles
42100 Klang
Selangor Darul Ehsan
West Malaysia
Tel: 603-3290 3333
Fax: 603-3290 2288
E-mail: sales@demcoalarm.com
demco@tm.net.my

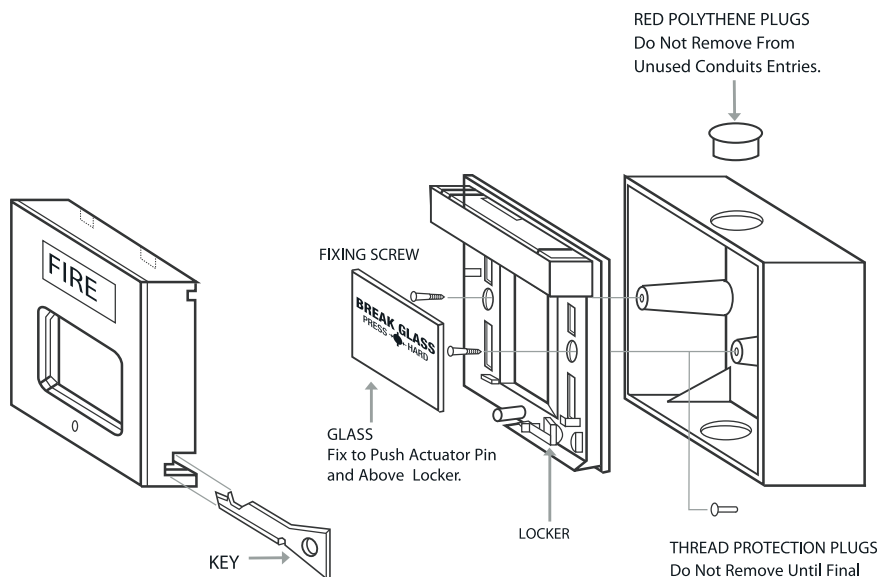

Quality without Compromise